

PRODUCT CATALOGUE

Stainless Steel Pipes, Tubes and Fittings for Critical Applications

- Seamless and Welded Tubes & Pipes
- Seamless and Welded Fittings
- Monel, Inconel, Hastelloy Tubes & Pipes



Index.....

| | |
|----------------------------------|-----|
| Company Profile | 1 |
| Products | 2-4 |
| Size Chart | 5 |
| Stainless Steel Standard | 6 |
| Stainless Steel Grade Equivalent | 7 |
| Manufacturing Facilities | 8 |
| Quality Control / Testing | 9 |



Company Profile

RexSteel, a flagship brand of RecommerceX Pvt. Ltd., specializes in Seamless Stainless Steel, Duplex, Titanium, and Nickel Alloy tubes and pipes for critical applications in heat exchangers, instrumentation, hydraulics, and mechanical systems. With ISO 9001:2015 certification and a state-of-the-art manufacturing facility in Ahmedabad, we serve both domestic and global markets with reliability and precision.

We are founded by a passionate team of alumni from **IIT Delhi**, **ISB Hyderabad**, and **MDI Gurgaon**. Leveraging deep R&D collaboration with IIT Delhi and HZDR Labs, Germany, we ensure every RexSteel product meets the highest international standards of precision and quality.

We take pride in offering world-class seamless tubing solutions at highly competitive prices, delivering superior value to our customers. Our foundation rests on technical excellence, rigorous quality assurance, and cost-effectiveness – making RexSteel a trusted name in advanced engineering materials.

Products

Seamless Stainless Steel Tubes & U Tubes (High Precision & Heat Exchanger Tubing) - Annealed & Pickled

Products Range

| | |
|-------------------|--|
| Outside Diameter: | 6.00 mm to 101.60 mm |
| Wall Thickness: | 0.70 mm to 8.00 mm |
| Grades: | TP 304/L/H, TP 310/L/H/S, TP 310 MOLN TP 316/L/H/Ti, TP 317/L, TP 321/H, TP 347/H, 904L UNS S31500, 31803, 32205, 32750, 32760 |
| Specification: | ASTM, ASME, DIN EN (GERMAN), NF (AFNOR), JIS (JAPAN). |



Application:

- Heat Exchangers
- Chemical & Petrochemical
- Gas Industry
- Nuclear Power Generation
- Pressure Vessels
- Marine Equipments
- Food Processing
- Automotive
- Aerospace

Seamless Stainless Steel Tubes & U Tubes (Hydraulic & Instrumentation Tubing) - Bright Annealed

Products Range

| | |
|-------------------|--|
| Outside Diameter: | 6.00 mm to 101.60 mm |
| Wall Thickness: | 0.70 mm to 8.00 mm |
| Grades: | TP 304/L/H, TP 310/L/H/S, TP 310 MOLN TP 316/L/H/Ti, TP 317/L, TP 321/H, TP 347/H, 904L UNS S31500, 31803, 32205, 32750, 32760 |
| Specification: | ASTM, ASME, DIN EN (GERMAN), NF (AFNOR), JIS (JAPAN). |



Application:


- Oil & Gas Extraction
- Chemical & Petrochemical
- Nuclear Power
- Food & Beverage Processing
- Automotive
- Aerospace

Products

Seamless Stainless Steel Pipes – Annealed & Pickled

Products Range

| | |
|-------------------|--|
| Outside Diameter: | 3/8" NPS to 16" NPS |
| Wall Thickness: | Sch 5S to Sch XXS |
| Grades: | TP 304/L/H, TP 310/l/H/S, TP 310 MoIN, TP 316/l/H/Ti, TP 317/l, TP 321/H, TP 347/H, 904L, UNS S 31500, 31803, 32205, 32750, 32760. |
| Specification: | ASTM, ASME, DIN EN (GERMAN) |

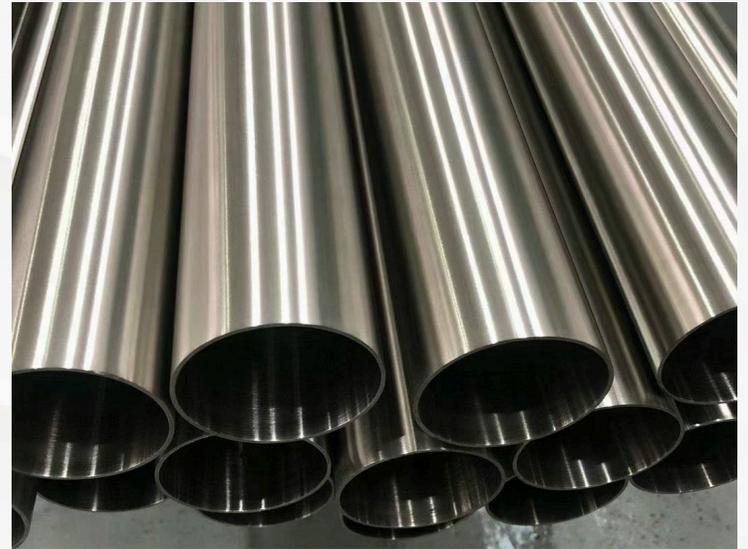

Application:

- Onshore and Offshore Oil and Gas Production, Exploration and Transport (OCTG – Oil Country Tubular Goods)
- Chemical & Petrochemical
- Energy and Power Generation
- Mechanical and Plant Engineering
- Liquefaction Projects
- Ship Building

Seamless High Nickel Alloy Pipes Tubes & U Tubes (Annealed – Pickled & Bright)



Application:

- Heat Exchangers, Condensers & Pressure Vessels
- Chemical & Petrochemical
- Gas Energy
- Power Generation
- Pressure Vessels
- Pulp & Paper
- Marine Equipments
- Food & Beverage Processing
- Automotive

Products Range

| | |
|-------------------|---|
| Outside Diameter: | 12.70 mm to 114.30 mm |
| Wall Thickness: | 0.70 mm to 12.70 mm |
| Grades: | NI 200/201, Monel 400, Inconel 600/601, 625, Hastelloy C22/C276, Alloy 800/H/HT/, 825 |
| Specification: | ASTM, ASME, DIN EN (GERMAN), |

Products

Stainless Steel Welded Pipes – Outside Diameter ; Wall thickness;

Products Range

| | |
|-------------------|--|
| Outside Diameter: | 1/8"-20" |
| Wall Thickness: | SCH 5S to SCH 80 S |
| Grades: | 304/UH/LN, 316/UH/LN/Ti, 309, 310/UH/S, 317/UH, 321/H, 347/H, UNS S31500, UNS S31803, UNS S2205, UNS S32750, UNS S32760, 1.4301, 1.4306, 1.4307, 1.4571, 1.4541, 1.4401, 1.4404, 1.4435, 1.4462 ASTM/ASME A/SA-312, A/SA-790, A-554, A-778, EN 10217-7 |
| Specification: | ASTM, ASME, DIN EN (GERMAN) |



Application:

- Chemical & Petrochemical
- Gas Industry
- Power Generation
- Mechanical & Plant Engineering
- Marine Equipment's
- Pulp & Paper
- Pharmaceutical Industry
- Sugar Industry

ERW Steel Pipe (Electric Resistance Welded Pipe), EFW (Electric Fusion Weld)

Products Range

| | |
|-------------------|---|
| Outside Diameter: | Outside Diameter: 1/2"-24" |
| Wall Thickness: | Wall Thickness: 1.65-20mm |
| Grades: | Grades- 304, 304L, 316, 321, 904L, Duplex, and Super Duplex |
| Specification: | ASTM, API, DIN EN (GERMAN) |



Application:

- Water Supply and Drainage
- Foundation piling
- General engineering and fabrication.
- Support columns and steel structures.
- Industrial process piping.

TUBE SIZE CHART

| ACCORDING TO SWG & BWG | | | | | | | | | |
|------------------------|---------------------|-----------|-------|-------|------------------|---------------------|-----------|-------|------|
| OUTSIDE DIAMETER | | THICKNESS | | | OUTSIDE DIAMETER | | THICKNESS | | |
| INCH | MM | SWG | INCH | MM | INCH | MM | BWG | INCH | MM |
| 3/8"-TO-4" | 9.53 MM-TO-101.6 MM | 22 | 0.028 | 0.71 | 3/8"-TO-4" | 9.53 MM-TO-101.6 MM | 22 | 0.028 | 0.71 |
| | | 21 | 0.032 | 0.81 | | | 21 | 0.032 | 0.81 |
| | | 20 | 0.036 | 0.91 | | | 20 | 0.035 | 0.89 |
| | | 19 | 0.040 | 1.02 | | | 19 | 0.042 | 1.07 |
| | | 18 | 0.048 | 1.22 | | | 18 | 0.049 | 1.24 |
| | | 17 | 0.056 | 1.42 | | | 17 | 0.058 | 1.47 |
| | | 16 | 0.064 | 1.63 | | | 16 | 0.065 | 1.65 |
| | | 15 | 0.072 | 1.83 | | | 15 | 0.072 | 1.83 |
| | | 14 | 0.080 | 2.03 | | | 14 | 0.083 | 2.11 |
| | | 13 | 0.092 | 2.34 | | | 13 | 0.095 | 2.41 |
| | | 12 | 0.104 | 2.64 | | | 12 | 0.109 | 2.77 |
| | | 11 | 0.116 | 2.95 | | | 11 | 0.120 | 3.05 |
| | | 10 | 0.128 | 3.25 | | | 10 | 0.134 | 3.40 |
| 9 | 0.144 | 3.66 | 9 | 0.148 | 3.76 | | | | |
| 8 | 0.160 | 4.06 | 8 | 0.165 | 4.19 | | | | |

LEGENDS: SWG= STANDARD WIRE GAUGE, BWG= BIRMINGHAM WIRE GAUGE

ID (INSIDE DIAMETER) = OD-(THICK*2)

NON-STANDARD TUBES ARE AVAILABLE ON REQUEST

*** TUBES ARE OFFERED AS MACHINED ON EXTERNAL SURFACE AND WITH RANDOM LENGTH (SRL/DRL).**

PIPE SIZE CHART

| ANSI B36.19 Stainless Steel | | | | | | | | | Pipe Dimensions and Weight per KG | | | | | | | |
|-----------------------------|-------|------------------|--------------|--------------|---------------|---------------|---------------|---------------|-----------------------------------|---------------|---|---------------|----------------|---------------|-------|---------------|
| Nominal Pipe Size | | Outside Diameter | Schedule 5 S | | Schedule 10 S | | Schedule 20 S | | Schedule 40 S | | Schedule 80 S | | Schedule 160 S | | XXS | |
| mm | inch | mm | WT mm | WEIGHT(KG/M) | WT mm | WEIGHT (KG/M) | WT mm | WEIGHT (KG/M) | WT mm | WEIGHT (KG/M) | WT mm | WEIGHT (KG/M) | WT mm | WEIGHT (KG/M) | WT mm | WEIGHT (KG/M) |
| 3 | 1/8 | 10.3 | 1.2 | 0.26 | 1.24 | 0.28 | 1.5 | 0.33 | 1.73 | 0.37 | 2.41 | 0.47 | - | - | - | - |
| 6 | 1/4 | 13.7 | 1.2 | 0.37 | 1.65 | 0.49 | 2 | 0.58 | 2.24 | 0.63 | 3.02 | 0.8 | - | - | - | - |
| 10 | 3/8 | 17.1 | 1.2 | 0.47 | 1.65 | 0.63 | 2 | 0.74 | 2.31 | 0.84 | 3.2 | 1.1 | - | - | - | - |
| 15 | 1/2 | 21.3 | 1.65 | 0.8 | 2.11 | 1 | 2.3 | 1.07 | 2.77 | 1.27 | 3.73 | 1.62 | 4.78 | 1.94 | 7.47 | 2.55 |
| 20 | 3/4 | 26.7 | 1.65 | 1.02 | 2.11 | 1.28 | 2.55 | 1.52 | 2.87 | 1.69 | 3.91 | 2.2 | 5.56 | 2.9 | 7.82 | 3.64 |
| 25 | 1 | 33.4 | 1.65 | 1.3 | 2.77 | 2.09 | 2.55 | 1.94 | 3.38 | 2.5 | 4.55 | 3.24 | 6.35 | 4.24 | 9.09 | 5.45 |
| 32 | 1.1/4 | 42.2 | 1.65 | 1.65 | 2.77 | 2.7 | 3 | 2.9 | 3.56 | 3.39 | 4.85 | 4.47 | 6.35 | 5.61 | 9.7 | 7.77 |
| 40 | 1.1/2 | 48.3 | 1.65 | 1.9 | 2.77 | 3.11 | 3 | 3.35 | 3.68 | 4.05 | 5.08 | 5.41 | 7.14 | 7.25 | 10.15 | 9.55 |
| 50 | 2 | 60.3 | 1.65 | 2.39 | 2.77 | 3.93 | 3 | 4.24 | 3.91 | 5.44 | 5.54 | 7.48 | 8.74 | 11.11 | 11.07 | 13.44 |
| 65 | 2.1/2 | 73 | 2.11 | 3.69 | 3.05 | 5.26 | 4 | 6.81 | 5.16 | 8.63 | 7.01 | 11.41 | 9.53 | 14.91 | 14.02 | 20.39 |
| 80 | 3 | 88.9 | 2.11 | 4.51 | 3.05 | 6.45 | 4 | 8.37 | 5.49 | 11.29 | 7.62 | 15.27 | 11.1 | 21.3 | 15.24 | 27.68 |
| 100 | 4 | 114.3 | 2.11 | 5.84 | 3.05 | 8.36 | 4 | 12.18 | 6.02 | 16.07 | 8.56 | 22.32 | 13.49 | 33.54 | 17.12 | 41.03 |
| 125 | 5 | 141.3 | 2.77 | 9.47 | 3.4 | 11.57 | 4 | 16.8 | 6.55 | 21.8 | 9.53 | 30.97 | 15.88 | 49.11 | 19.05 | 57.43 |
| 150 | 6 | 168.3 | 2.77 | 11.32 | 3.4 | 13.82 | 5 | 25.36 | 7.11 | 28.26 | 10.97 | 42.56 | 18.25 | 67.53 | 21.95 | 79.22 |
| 200 | 8 | 219.1 | 2.77 | 14.78 | 3.76 | 19.96 | 5 | 33.31 | 8.18 | 42.55 | 12.7 | 64.64 | 23.01 | 111.27 | 22.23 | 107.92 |
| 250 | 10 | 273.1 | 3.4 | 22.61 | 4.19 | 27.78 | 5 | 41.77 | 9.27 | 60.31 | 12.7 | 81.55 | 28.58 | 172.33 | 25.4 | 155.15 |
| 300 | 12 | 323.8 | 3.96 | 31.24 | 4.57 | 36 | 5 | 49.7 | 9.53 | 73.85 | 12.7 | 97.43 | 33.32 | 238.68 | 25.4 | 186.9 |
| 350 | 14 | 355.6 | 3.96 | 34.34 | 4.78 | 41.3 | 6 | 67.9 | 11.13 | 94.54 | ASTM A312/A213/A249/A269/A270, ASTM A358 CLI TO CL V, A409, A554 TP 304/304L/316/316L/317L/309/310/321 etc. | | | | | |
| 400 | 16 | 406.4 | 4.19 | 41.56 | 4.78 | 47.34 | 6 | 77.82 | 12.7 | 123.3 | | | | | | |

Formula - Pipe Weight OD - Thickness X Thickness x 0.0248 = wt . Kg per Mtr.

ASTM/ASME- STAINLESS STEEL STANDARDS

| | |
|---------------------|---|
| ASTM A213/A213M | Standard specification for seamless ferritic and austenitic alloy-steel boiler, superheater, and heat-exchanger tubes |
| ASTM A268/A268M | Standard specification for seamless and welded ferritic and martensitic stainless steel tubing for general service |
| ASTM A269/A269M | Standard specification for seamless and welded austenitic stainless steel tubing for general service |
| ASTM A312/A312M | Standard specification for seamless, welded, and heavily cold worked austenitic stainless steel pipes |
| ASTM A376/A376M | Standard specification for seamless austenitic steel pipes for high-temperature central-station service |
| ASTM A511 | Standard specification for seamless stainless steel mechanical tubing and hollow bars |
| ASTM A789/A789M | Standard specification for seamless and welded ferritic/austenitic stainless steel tubing for general service |
| ASTM A790/A790M | Standard specification for seamless and welded ferritic/austenitic stainless steel pipes |
| ASME SA 213/SA 213M | Standard specification for seamless ferritic and austenitic alloy-steel boiler, superheater, and heat-exchanger tubes |
| ASME SA 268/SA 268M | Standard specification for seamless and welded ferritic and martensitic stainless steel tubing for general service |
| ASME SA 312/SA 312M | Standard specification for seamless and welded austenitic stainless steel pipes |
| ASME SA 376/SA 376M | Standard specification for seamless austenitic steel pipes for high-temperature central-station service |
| ASME SA 789/SA 789M | Standard specification for seamless and welded ferritic/austenitic stainless steel tubing for general service |
| ASME SA 790/SA 790M | Standard specification for seamless and welded ferritic/austenitic stainless steel pipes |

EUROPEAN NORMS/ EN - STAINLESS STEEL STANDARDS

| | |
|--------------|---|
| EN 10216-5 | Seamless steel tubes for pressure purposes. Stainless steel tubes |
| EN 10294-2 | Hollow bars for machining. Stainless steels with specified machinability properties |
| EN 10297-2 | Hollow bars for machining. Stainless steels with specified machinability properties |
| DIN 17456 | Seamless circular stainless steel tubes with general quality requirements |
| DIN 17458 | Seamless circular austenitic stainless steel tubes subject to special requirements |
| DIN 17459 | Seamless circular high-temperature austenitic steel tubes |
| DIN 28180-85 | Seamless steel tubes for tubular heat-exchangers |
| NF A 49-117 | Steel tubes. Seamless plain end tubes for pipelines and other uses. Ferritic and austenitic stainless steels |
| NF A 49-217 | Steel tubes. Seamless tubes for heat-exchangers. Stainless ferritic, austenitic and ferritaustenitic steel grades |
| NF A 49-317 | Steel tubes. Seamless steel plain-end mechanical tubing. Austenitic stainless steel |

GOST- STAINLESS STEEL STANDARDS

| | |
|---------------|--|
| GOST 10498-82 | Specific thin-walled corrosion resistant seamless steel tubes |
| GOST 14162-79 | Small-sized (capillary) steel pipes |
| GOST 19277-73 | Seamless steel tubes for oil and fuel lines |
| GOST 9940 | Hot-finished seamless tubes of corrosion resistant steel grades |
| GOST 9941 | Cold-finished and warm-finished seamless tubes of corrosion resistant steel grades |

GRADE EQUIVALENTS – STAINLESS STEEL

| ASTM (USA) | UNS (USA) | B.S. (UK) | EN/DIN (Germany) | AFNOR (France) | UNI (Italy) | SS (Sweden) | JIS (Japan) | JIS (Korea) |
|---|-----------|-----------------|------------------|----------------------------|------------------------|-------------|-------------|-------------|
| Austenitic – General Service and Wet Corrosion | | | | | | | | |
| 304 | S30400 | 304S31 / 304S11 | 1.4301 | Z7 CN 18-09 / Z6 CN 18-09 | X5CrNi18 10 | 2333 | SUS 304 | STS 304 |
| 304L | S30403 | 304S11 | 1.4306 | Z3 CN 18-10 | X2CrNi18 II | 2332 | SUS 304L | STS 304L |
| | | | 1.4307 | Z3 CN 18-10 | | | | |
| 304LN | S30453 | 304S61 | 1.4311 | Z3 CN 18-10 Az | | 2371 | SUS 304LN | STS 304LN |
| 316 | S31600 | 316S31 | 1.4401 | Z7 CND | X5CrNiMo | 2347 | SUS 316 | STS 316 |
| | | | | 37577 | 17 12 | | | |
| | | 316S33 | 1.4436 | Z7 CND | X5CrNiMo | 2343 | | |
| | | | | 37973 | 17 13 | | | |
| 316L | S31603 | 316S31 | 1.4404 | 37S17 | X2CrNiMo | 2348 | SUS 316L | STS 316L |
| | | 316S33 | 1.4435 | 37S19 | 17 12 | | | |
| | | 316S34 | | | X2CrNiMo | 2353 | | |
| 316N | S31651 | | | | | | | |
| 316LN | S31653 | 316S61 | 1.4406 | Z3 CND | | | SUS 316LN | STS 316LN |
| 316Ti | S31635 | | 1.4571 | 37S9 / 37S13 | X6CrNiMoTi17 12 2 | 2350 | SUS 316Ti | STS 316Ti |
| 317 | S31700 | 317S16 | 1.4449 | | | | SUS 317 | |
| 321 | S32100 | 321S31 / 321S51 | 1.4541 | Z6 CNDT 18-10 | X6CrNiTi18 11 | 2337 | SUS 321 | STS 321 |
| 347 | S34700 | 347S31 / 347S51 | 1.455 | Z6 CNDT 18-10 | X6CrNiNb18 10 | | SUS 347 | STS 347 |
| 904L | N08904 | 904S13 | 1.4539 | Z6 NCDU 25-20 | | 2562 | SUS 890L | STS 890L |
| Duplex – General Service and Wet Corrosion | | | | | | | | |
| ASTM (USA) | UNS (USA) | B.S. (UK) | EN/DIN (Germany) | AFNOR (France) | UNI (Italy) | SS (Sweden) | JIS (Japan) | JIS (Korea) |
| – | S31803 | – | 1.4462 | Z2 CND 22-05 Az | – | 2377 | – | – |
| – | S32205 | 318S13 | 1.4462 | Z3 CND 22-05 Az | – | 2377 | SUS 329J3L | STS 329J3L |
| Super Duplex – General Service and Wet Corrosion | | | | | | | | |
| ASTM (USA) | UNS (USA) | B.S. (UK) | EN/DIN (Germany) | AFNOR (France) | UNI (Italy) | SS (Sweden) | JIS (Japan) | JIS (Korea) |
| – | S32750 | – | 1.441 | – | – | – | – | – |
| – | S32760 | – | 1.441 | – | – | – | – | – |
| Austenitic – Heat Resistant | | | | | | | | |
| ASTM (USA) | UNS (USA) | B.S. (UK) | EN/DIN (Germany) | AFNOR (France) | UNI (Italy) | SS (Sweden) | JIS (Japan) | JIS (Korea) |
| 304H | S30409 | 304S51 | 1.4948 | Z6 CN 18-09 | X8CrNi 18 10 | 2333 | SUS 304 | STS 304 |
| 321H | S32109 | 321S51 | 1.4878 | Z6 CNT 18-10 | X8CrNiTi | 2337 | SUS 321 | – |
| 347H | S34709 | 347S51 | – | – | 18 11 / X8CrNiNb 18 11 | 2347 | – | – |
| 310S | S31008 | 310S16 / 310S24 | 1.4845 | Z6 CN 25-20 / Z12 CN 25-20 | X6CrNi 2520 | 2361 | SUS 310S | STS 310S |
| 310H | S31009 | – | – | – | – | – | – | – |
| 314 | S31400 | – | 1.4841 | Z15 CNS 25-20 | – | – | – | – |

Manufacturing Facilities

Below are the advanced manufacturing facilities at REXSTEEL, supporting high-quality production for steel pipes and tubes:



Pilgering Line

Enables precise cold forming of seamless pipes, ensuring superior dimensional accuracy and surface finish.



Draw Bench

Used for drawing pipes to exact sizes and thicknesses, improving mechanical properties and surface uniformity.



ERW Line

High-speed Electric Resistance Welding (ERW) line for consistent fabrication of welded steel pipes, optimizing efficiency and weld integrity.



Annealing Furnace

Provides controlled heat treatment, relieving stress and enhancing ductility and toughness in pipes.



Pickling Line

Removes surface impurities and scales from steel pipes, ensuring clean surfaces for further processing or finishing.

Quality Control

| NON DESTRUCTIVE TEST | DESTRUCTIVE TEST |
|----------------------|--------------------------|
| Eddy Current Test | Flaring Test |
| Hydrostatic Test | Hardness Test |
| Ultrasonic Testing | Reverse Bend |
| Metalography Test | Test Flattening |
| Visual Inspection | Test Corrosion |
| DP/MP/RF ECT Testing | Test Impact/Tensile Test |

NON DESTRUCTIVE Testing Machines:

Online testing of tubes / pipes by Ultrasonic Testing & Eddy Current Method to check dimension, length and other defects.

| Ultrasonic | |
|----------------------------|---------------------------|
| Type Rotating Probe Method | 20 Channels |
| Transverse Defect | 8 Probes |
| Wall Thickness | 9 Probes |
| OD & ID | 2 Probes |
| Speed of Testing | Upto 20 Meters per Minute |
| Notch Depth | 5% of Wall Thickness |

DIMENSION, INSIDE CAMERA, MARKING, HYDRO TEST, PMI TEST, EDDY CURRENT





PIONEERS IN SEAMLESS AND WELDED PIPES AND TUBES

 Mumbai

 Ahmedabad

 Delhi-NCR

Corporate Office:
105, 1st Floor, Tower B, Noida One,
Sector 62, Noida, Uttar Pradesh, 201301

Manufacturing Plant (Ahmedabad):
A-8,9,10 Satyamev Heartland India Park,
Kadi, Gujarat, 382705